




# DS1398

Low profile soundmasking and paging speaker for 4 ohm systems

tech spec\_sheet  
The industry's largest supplier of design-build soundmasking solutions


## Features:

- For use in floor cavities as shallow as 1-3/4"
- Optional Bridge mount
- Performance-engineered dual drivers with tuned ports well suited for soundmasking produce uniform 360-degree dispersion
- UL listed UL1480 and UL2043

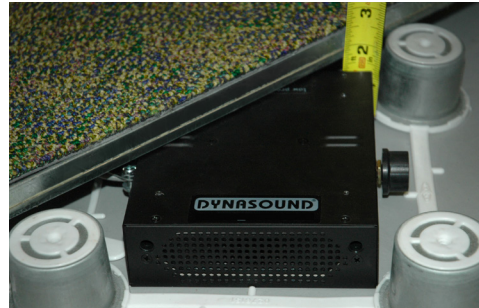

## Description:

The DS1398 contains dual, horizontally opposed speakers which produce uniform sound dispersion ideally suited for reverberant under floor cavities and ceiling plenums. An optional mounting bridge is available for use in ceiling plenums where conventional soundmasking speakers are not applicable.

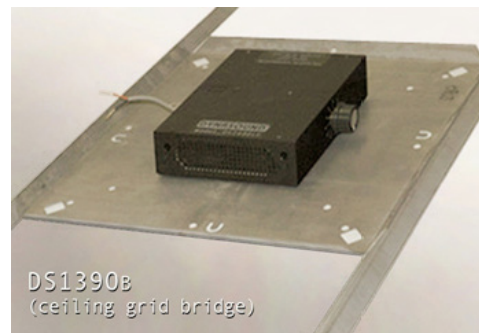

## Specifications:

Loudspeaker:	Dual horizontally opposed high performance drivers
Impedance:	4 ohms
Power Rating:	10 watts
Dimensions:	5.25 inches x 6.25 inches x 1.80 inches tall
Weight:	1.75 lbs.
Finish:	black

## Architect's Specification:

Sound masking speaker assembly shall be Dynasound model DS1398. Unit shall contain dual horizontally opposed loudspeakers, with dual internal acoustical chambers. The unit shall be factory assembled, wired and ready for installation. Strain relief shall be provided to protect hook-up leads. The enclosure shall measure 5.25 inches by 6.25 by 1.80 inches tall. Speaker shall be UL listed to conform to UL1480, UL2043 and CSA 60065.

## Use with:



DS8000 Network