

DATA SHEET

Qt® EMITTER MOUNTING ACCESSORIES



UNIVERSAL BRACKET

SKU: AE-UB-W (white), AE-UB-B (black)

For mounting the emitter to a wall or ceiling. Rotates in 45-degree increments for optimal sound dispersion. Ships with screws and screw anchors. Compatible with both Qt Active Emitter and Qt Standard Emitter.

DIMENSIONS

Total height (as shown at left):
5.5" (14 cm)

Cylinder height:
4" (10.16 cm)

Cylinder diameter:
3.5" (8.89 cm)

Bracket width:
3.75" (9.53 cm)

Bracket height:
3.625" (9.21 cm)

Bracket length:
2.5" (6.1 cm)

Weight:
3.9 oz. (110.56 g)



BEAM BRACKET

SKU: AE-UB-W (white), AE-UB-B (black)

For mounting the emitter to exposed I-beams or trusses. Ships with bolt for attaching clamp to cylinder and for attaching clamp to beams. Compatible with both Qt Active Emitter and Qt Standard Emitter.

DIMENSIONS

Cylinder length:
4" (10.16 cm)

Cylinder diameter:
3.5" (8.89 cm)

Clamp opening:
.95" (2.4 cm)

Clamp width:
.94" (2.39 cm)

Clamp height:
1.5" (3.81 cm)

Clamp length:
1.75" (4.45 cm)

Weight:
4.2 oz. (119.07 g)



PENDANT MOUNT

SKU: PM-W (white), PM-B (black)

Offers a simple and attractive way to install Qt Active or Standard Emitters in an open or raised ceiling space and suspends them at the optimum height for best coverage. Includes pendant mount top and cylinder, cable, and cable box cover assembly.

DIMENSIONS

Height:
7" (17.8 cm)

Diameter:
3.3" (8.4 cm)

Hanging Weight:
12 oz. (340g)

Mounts to:
4" octagonal electrical ceiling box

Cable:
4 wire UTP, 24 AWG



DRYMOUNT MOUNT

SKU: DM

For mounting the emitter into drywall ceilings. Compatible with both Qt Active Emitter and Qt Standard Emitter.

DIMENSIONS

Cylinder length: 2.1" (5.4 cm)


Cylinder diameter:
3.5" (8.9 cm)

Weight:
1.2 oz. (34 g)

Max. drywall depth:
0.75" (1.9 cm)

Material:
PC/ABS

Color:
White

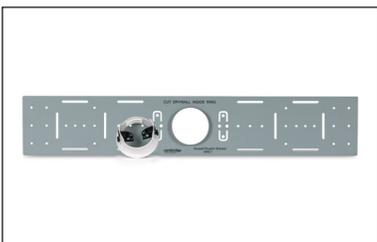

DRYWALL ROUGHIN BRACKET

SKU: DRB-1

For installing with holes left for cables and Qt® Emitters before the drywall ceiling is hung. Slats make the bracket easier to fold and fit into joists and holes are included to help nail or screw it into place. Tabs fold up to hold emitter in place. Specify DRB-1 Kit to get the Drywall Roughin Bracket with the Drywall Mount (DM).


DIMENSIONS

Height:
.375" (.953 cm)

Length:
28" (71.12 cm)

Width:
5" (12.7 cm)

Weight:
1.41 lb. (639.57 g)

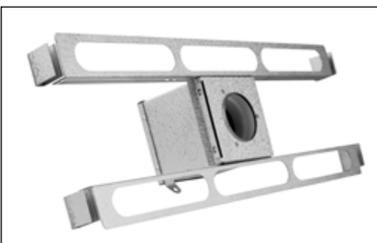

CEILING CONDUIT MOUNT (4-PACK)

SKU: CCM-1

For mounting the emitter into acoustic ceiling tile or drywall in regions with special fire and/or conduit requirements. Ceiling tile and drywall mounting rails included. Compatible with Qt Standard and Qt Active emitters.

SPECIFICATIONS

Enclosure Dimensions (H x W x D): 5" x 4.9" x 5.1" (14 cm x 12.5 cm x 12.95 cm)

Weight: enclosure: 2.43 lbs. (1.1 kg); ceiling tile rails: 1.26 lbs./pair (.57 kg); drywall rails: 1.01 lbs./pair (.45 kg)

Knockouts: 9 double-tap

Knockout Diameter:
7/8" (2.22 cm)

Mounting Rails: 2' **Material:** Galvanized steel

Color: Silver

Biamp, Qt, and QtPro are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.



✉ biampinfo@biamp.com

☎ +1 503 641 7287

🌐 www.biamp.com

CSMDS-618-2006-EN-R1