



# The Qt Active Emitter

A powerful all-in-one sound masking, office paging, and background music loudspeaker

## SMALL AND POWERFUL

The new Qt® Active Emitter is a single-source Emitter capable of both sound masking and simultaneous clear reproduction of paging and music signals. It provides higher SPL and a broader frequency range than previous direct field Emitter offerings in a small, powerful speaker that's virtually invisible once deployed in finished or open structure ceilings.

## CLEAR, ARTICULATE PAGING AND BACKGROUND MUSIC

Another benefit of direct field technology is improved audio clarity for paging and music. Because pages are being emitted directly into the environment, they're clearer and easier for listeners to understand. Music sounds better too because the speaker is facing the listener instead of being played through a ceiling material. The Qt Active Emitter is the only sound masking loudspeaker that's a complete masking, paging, and music solution for office environments.

## UNIFORM DIRECT FIELD MASKING

Traditional sound masking systems use large loudspeakers the size of paint cans to reverberate sound off of the ceiling deck that indirectly distribute masking sound into an environment. In contrast, the small, sleek Qt Active Emitter utilizes Biamp's patented direct field Quiet Technology to deliver uniform sound masking directly into the workspace.

## THE FAVORITE INSTALLATION CHOICE OF INTEGRATORS

The Qt Active Emitter uses the same control modules and cabling infrastructure that made QtPro™ the number one sound masking system choice of companies worldwide as well as the favorite installation choice of integrators. As a result, QtPro remains the easiest sound masking system to install and calibrate, regardless of whether the Active Emitter or original Emitter is used—a true plug and play experience with preset sound masking curves designed specifically for each emitter type.

## FEATURES

- Active electronics power the speaker
- Ported enclosure design allows lower frequency extension down to 125 Hz octave band for sound masking and 115 Hz for paging and music
- 17 dB louder than previous direct field emitter offerings
- Plenum-rated, UL-listed, and complies with UL 2043
- Delivers four uncorrelated audio channels to reduce phasing/comb-filtering
- Comes standard with a slip-ring mount for acoustical tile mounting
- Rear DIP switches reduce volume by 4.5 dB in 1.5 dB increments, if needed
- Compatible with DynasoundPro Network System (Specify DS1320)



### Active Emitter Power Supply

- Supplies power to Qt Active Emitters
- Capacity to power 150 Qt Active Emitters
- Three Output Connectors (50 Emitters per output)
- Utilizes 14/2 conductor cabling to power Qt Active Emitter Power Injector
- Rack or wall mountable

## BENEFITS

- Delivers superior uniformity which leads to a more comfortable sound masking experience and clear, quality office paging and background music
- Small but powerful speaker that's virtually invisible once deployed in finished or open structure ceilings
- Utilizes the same control modules, cabling infrastructure, and speaker driver size as other Biamp sound masking systems, ensuring QtPro remains the easiest sound masking system to install and calibrate
- Provides new opportunities for sound masking system customization and optimization
- Features an extended sound masking spectrum for additional comfort
- Ability to use both the Qt Active Emitter and original Qt Emitter on the same control processor simultaneously, if needed (requires separate zones)



### Active Emitter Power Injector


- Combines DC power from Qt Active Emitter Power Supply and Signal from QtPro Controller for Qt Active Emitters
- Two outputs: each supports up to 25 Qt Active Emitters
- Plenum or headend mounted — fits in standard 4x4 electrical box

## TECHNICAL SPECIFICATIONS

*Sound Masking Frequency Response	125 Hz - 10,000 Hz
*Music / Paging Frequency Response	115 Hz - 12,000 Hz (-10 dB)
*Masking Min - Max SPL	30 dBA to 60 dBA @ 1 meter
*Music / Paging Max SPL	74 dBA @ 1 meter
Nominal Impedance	40,000 $\Omega$
Nominal Dispersion	170 degrees conical / half space
Connections	Input / Output - RJ45 Modular Jack
Channel Selection	Four Channel Auto Sequencing and Repeating
Selectable Attenuation	0 dB, -1.5 dB, -3 dB, -4.5 dB
Cabling	Category UTP Cabling (8 conductor)
Included Accessories	Acoustic Ceiling Tile Mounting Ring
Loudspeaker Type	Active w/ Integral Amplifier
Maximum Power Consumption	2 Watts
Operating Voltage	36 VDC
Driver Diameter	1.25" (3.2 cm)
Enclosure	Front Vented
Color	White
Height	3.5" (8.9cm)
Diameter	3.25" (8.3cm)
Weight	6.5 oz. (184 g)
Certifications	UL 2043
SKU	E-P-W-16-4 (4 Pack of White Emitters with 4 x 16ft Cables)

\* Specifications based on emitter array using published layout practices in conjunction with Qt Control Processor.

## QT ACTIVE EMITTER CABLING OVERVIEW

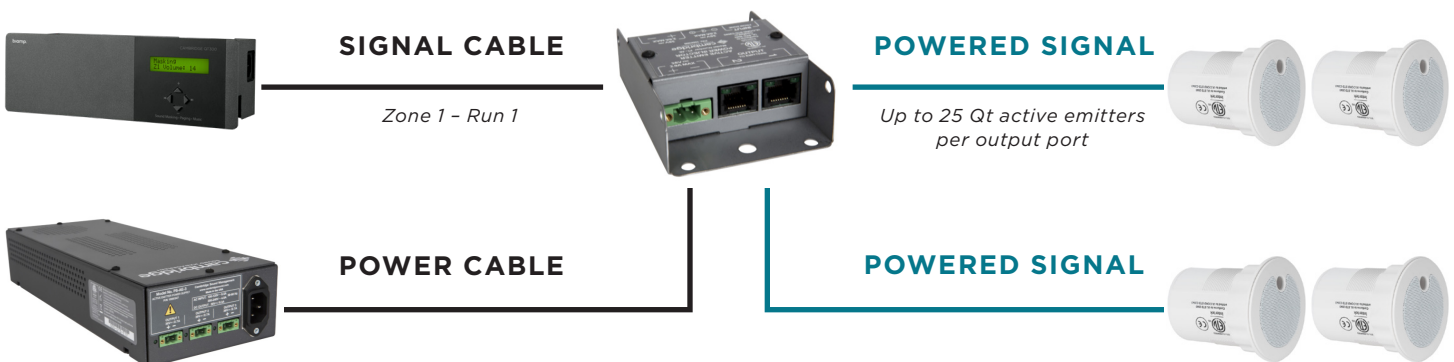

- Signal Cable - Cat 3, 5, 5e, 6 UTP Category - Plenum Rated Cable
- Power Cable - 14/2 Plenum Rated Cable
- Powered Signal Cable - Cat 3, 5, 5e, 6 UTP Category - Plenum Rated Cable (Active Emitters ship with 16 foot cables)

0923

Visit [www.biamp.com/soundmasking](http://www.biamp.com/soundmasking) to learn more about the many benefits of our industry-leading sound masking solutions.