


### PRODUCT DESCRIPTION

The DS1360 / DS1368 contains an eight inch diameter speaker. The premium sized 690 cubic inch enclosure includes a rigid foam acoustical insert to eliminate standing waves and metallic resonance. Dynasound's DS1360 / DS1368 soundmasking speaker is designed for quick and easy installation above suspended ceilings and includes a dust-proof perforated steel baffle. The DS1360 / DS1368 provides uniform dispersion and is well suited for soundmasking, paging and music signals.

### FEATURES

- Made in the USA
- Easily installed in upward facing, side facing or downward facing applications
- Internal 70.7 volt transformer with rotary volume control - or may be specified for eight ohm operation (specify DS1368)
- Single point suspension for easy installation
- Material and construction permits use where ceiling plenum is part of the air handling system

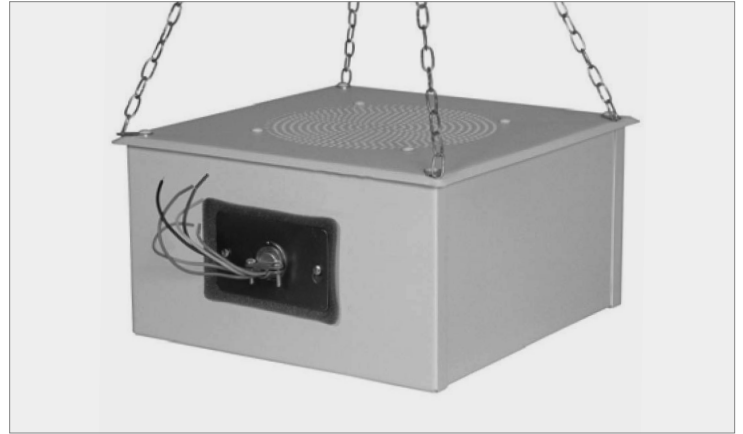

### TECHNICAL SPECIFICATIONS

<b>Loudspeaker:</b>	Eight inch diameter premium loudspeaker
<b>DS1360 Transformer:</b>	Primary 70.7v, Secondary 8 Ohms, Switch Positions: 1/4, 1/2, 1, 2, 4 watts
<b>Dimensions:</b>	11.5 inches x 11.5 inches x 6.25 inches tall
<b>Weight:</b>	8 lbs.
<b>Finish:</b>	White
<b>Average sensitivity:</b>	95 dB SPL 1 W 1 M
<b>Loudspeaker power rating:</b>	20 W
<b>Magnet:</b>	10 oz. ceramic

### USE WITH:



DS1042 System



DS1092 System



DSRMP-Attenuator